




Diamond Wall Pro

A Premium Cementitious, Fiber-reinforced, Polymer-modified Base Coat

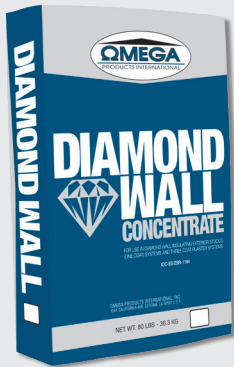

COVERAGE

Approximately 5.3 yd² to 6.7 yd² (4.9m² to 6.1m²) per bag at 1/2" thickness. Coverage may vary due to ambient temperature, surface temperature, surface porosity, mixing and/or application methods.

PACKAGING

Moisture resistant, 80lb (36.3kg) bags

STORAGE

1. Store in a cool, dry location.
2. Store away from direct contact with the ground and/or concrete.
3. Protect from weather and other damage.

SHELF LIFE

1 year

COLOR

Natural grey

PRODUCT DESCRIPTION

Diamond Wall Pro offers an upgrade to current one coat stucco systems by providing improved crack resistance, flexural and tensile strength, and impact resistance in a convenient single component package.

Diamond Wall Pro is a factory prepared blend of approved cement, chopped fibers, polymers, and other proprietary ingredients that comes in both Sanded and Concentrate versions.

FEATURES

BENEFITS

<i>Polymer Modified</i>	Improved crack resistance, flexural and tensile strength, and impact resistance
<i>Fiber-reinforced</i>	Reduced cracking
<i>Single Application with 24-hr Cure Time</i>	Reduced labor and scaffolding costs; schedule savings
<i>Durable</i>	Superior weathering properties
<i>1-hour Fire-resistive-rated</i>	Single-family, multi-family, and commercial applications
<i>Noncombustible Assemblies</i>	Can be used over 40 feet high in Type I, II, III, and IV construction

BASIC USES

Diamond Wall Pro is designed for use as a base coat in residential and commercial wall assemblies. It provides an ideal base coat for the application of OmegaFlex or AkroFlex Acrylic Finishes and ColorTek Stucco. Diamond Wall Pro exceeds ASTM C926 requirements for scratch and brown coats and may be used in three coat stucco applications. For one coat and three coat stucco systems refer to Intertek CCRR-0467.

AREA OF USES

Diamond Wall Pro may be applied over the following substrates:

1. Wood or OSB
2. Exterior grade gypsum sheathing/glass mat reinforced gypsum sheathing
3. Fiber board
4. EPS, XEPS, or polyisocyanurate foam boards
5. Masonry
6. Poured-in-place and/or tilt-up concrete
7. Other approved cementitious boards

OPTIONAL PRODUCT UPGRADES/ENHANCEMENTS

PRODUCT	BENEFITS
OmegaCure	Liquid accelerator to improve hydration, increase early strength/hardness, and allow cold weather application
Crack Isolation System	Supplementary system designed to mitigate surface cracking in new and existing plaster systems by integrating woven fiberglass mesh into the base coat or brown coat prior to applying the finish

SURFACE PREPARATION

Solid Substrates

For solid substrates, such as concrete or masonry, surfaces to receive application must be structurally sound, clean and free of debris, dirt, dust, efflorescence, grease, oils, curing agents, and cleaning solutions. Repair cracks with the appropriate patching material for the existing substrate as needed.

Framing

Ensure substrates, water-resistive barrier, and lathing have been installed and inspected as required by Intertek CCRR-0467, report, Omega Product's literature, and/or local building codes as applicable.

MIXING

1. Sanded - Add 1 to 2 gallons (3.8L to 7.6L) of potable water per bag to mixing apparatus.
Concentrate - Add 4 to 6 gallons (15.1L to 22.7L) of potable water per bag to mixing apparatus.
2. Add Diamond Wall Pro.
3. Concentrate - Add 160lb to 240lb (72.6kg to 108.9kg) of plaster sand, meeting ASTM C144 and/or ASTM C897. Amount of sand added may vary due to moisture content and/or composition of plaster sand.
4. Mix for approximately 3 to 5 minutes.
5. Stop mixer and allow the material to take its initial set.
6. Material may be retempered once adding only enough water to reach the desired consistency.

NOTE: Do not over mix.

APPLICATION

Diamond Wall Pro can be hand troweled or machine applied.

1. Apply the mixed Diamond Wall per Intertek CCRR-0467 for one coat application or ASTM C926 for three coat application.
2. Rod or screed to achieve a uniform surface.
3. Float the freshly applied Diamond Wall to ensure even suction.

NOTE: When applying Omega ColorTek or other cement-based finishes over Diamond Wall Pro, the use of a bonding agent or acrylic admix is required to ensure proper bond. The recommended volume of admix to be used is 1-2 quarts of Omega AkroLoc, or 2-3 quarts of Omega Admix 500 per 90-lb sack of ColorTek. Omega BondCrete or AkroLoc are recommended bonders. Omega ColorTek PM (Polyer-Modified) may be used without admix or bonder. See applicable Omega data sheet for additional information.

CURING

Provide sufficient moisture in the plaster mix or by moist or fog curing to permit continuous hydration of the cementitious

materials. The length of time and most effective procedure for curing will depend on climatic and job conditions. Product should fully cure in 7 to 28 days following application. Curing time may vary due to ambient temperature, surface temperature, surface porosity, application methods, and/or thickness of material. All freshly applied material must be protected by an approved protective system from inclement weather until material has sufficient strength not to be damaged.

LIMITATIONS

DO NOT apply product when the ambient and surface temperature is below 40°F (4°C).* The ambient and surface temperature must maintain the above requirements until material has sufficient strength not to be damaged (See CURING). Material that is allowed to freeze may suffer irreparable damage.

DO NOT add any other materials to the mixture of the product without written approval from Omega Products International.

DO NOT deviate in the mixing or application procedures contained in this, or any other Product Data Sheets, without written approval from Omega Products International.


DO NOT apply Diamond Wall if there are contaminants on the receiving surface. Contaminates may include, but are not limited to, dust, debris, efflorescence, and/or oils.

DO NOT add any more water than prescribed.

DO NOT saturate the wall during preparation and/or water curing.

DO NOT use excessive amounts of water when floating.

NOTE: Failure to follow manufacturer's written specifications could result in the following, but not limited to spalling, cracking, peeling, chipping, delamination, discoloration, wash off, and overall system failure.

 To ensure proper hydration in cold weather applications (approximately 50°F to 32°F) use OmegaCure admix. Refer to OmegaCure data sheet for additional information.

CLEANING

Cleaning may be accomplished with water immediately after use.

SAFETY

Avoid contact with eyes or prolonged contact with skin. Wash thoroughly after handling. In case of eye contact, flush immediately with running water for at least 15 minutes. Consult a physician immediately. Do not take internally. Be sure to provide adequate ventilation in enclosed areas. Use of an approved respirator is recommended.

KEEP OUT OF REACH OF CHILDREN

DISCLAIMER

Omega Products International [Manufacturer] MAKES NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE WITH RESPECT TO THE PRODUCT(S) SOLD HEREIN. The recommendations, suggestions, statements and technical data are based on the best knowledge available to Manufacturer and are given for informational purposes ONLY and without any responsibility for their use. It is expressly understood and agreed, as a condition of the use of this product, that the buyer's sole and exclusive remedy for any claimed defective product against Manufacturer shall be the replacement of products actually proven to be defective. Handling and use of the products are beyond the control of Manufacturer; therefore, no warranty is made, expressed or implied, as to the results obtained from the use of the product or against any claims for infringement of patents resulting from use of the product. Under no circumstance shall Manufacturer be liable for incidental or consequential damages arising out of the use or the improper application of the product. Before applying the product, the user shall determine the suitability of the product for their independent use, assuming all risks and liability whatsoever in connection therewith. This writing constitutes a complete and exclusive statement of the understanding between Manufacturer and Buyer.

CLAIMS

Any Claimant shall notify Manufacturer immediately in writing of any alleged defect in the material. Claimant will provide Manufacturer with a reasonable and exclusive opportunity to investigate and test for the alleged defect. For any claim that is not valid Claimant agrees to pay Omega's reasonable charges, including travel and labor associated with investigation of such claim.

TECHNICAL ASSISTANCE

Technical assistance and information is available by calling Omega Products International at (951) 737-7447 or by email at info@omega-products.com.

WARRANTY

The following is made in lieu of all expressed and implied rights, warranties and conditions, statutory or otherwise. The manufacturer's only obligation shall be to replace such quantity of products proven to be defective within one year following the date of manufacture, provided that the alleged defective product is returned prepaid to the manufacturer's plant and is accompanied with proof of purchase and batch number.